

AV Receiver RX-A850



AVENTAGE Network AV Receiver with Dolby Atmos® compatibility for genuine 3D surround sound in your own home. Also featuring High Resolution audio playback support, 4K Ultra HD full support, Wi-Fi and *Bluetooth*® Built-in, and audiophile design for detailed audio reproduction.













PANDORA











Hidden Control Panel Includes HDMI Input Terminal, USB Port, Video Aux Input Terminals, YPAO Optimised Microphone Jack, And More.

































7-channel powerful surround sound
100W per Channel (8 ohms, 20 Hz-20 kHz, 0.06% THD, 2 ch driven)
160W per Channel (8 ohms, 1 kHz, 10% THD, 1 ch driven)
 Dolby Atmos® support

- Extra 5th foot with Anti-Resonance Technology (A.R.T. Wedge) to reduce Vibration
 Aluminium Front Panel Offers Visual and Aural Benefits
- Nominion That Take Orles you and an Auria Betters
 Selected high quality parts to achieve optimum audio performance
 Pure Direct for pure HiFi sound quality enjoyment
 Latest Burr Brown DirectPath™ DA Converters
 New high quality Volume IC and Independent Pure Power Supply
- Low jitter PLL circuitry helps optimise sound imaging
 Assignable amplifiers for front speaker bi-amp connection
- Detachable Power Cable for easier installation (also allows cable upgrade) • Intelligent assignable amplifiers for Surround Back <-> Front Presence or Zone 2
- DSD 2.8MHz/5.6MHz audio playback
- FLAC or WAV 192kHz/24-bit audio playback
- Apple Lossless audio playback
- Compressed Music Enhancer for Bluetooth
 Phono input for vinyl playback

Video Features

- 4K video upscaling from analogue and HDMI input
- HDMI: 8 (1 on front) and 2 output with HDCP2.2 (3 in/2 out), 3D and Audio Return Channel
 Supports Deep Colour (30/36 bit), x.v.Colour, 24 Hz Refresh Rate and Auto Lip-Sync compensation
- High quality video processing with precise deinterlacing
- Motion adaptive and edge adaptive deinterlacing
- Multi-cadence (incl. 3-2 pull-down) detection

Advanced Features

- Bluetooth for wireless music streaming (SBC/AAC)
- Network functions
 Wi-Fi Built-in (802.11b/g/n)

- Wi-Fi Built-In (802.11b/g/n)
 Easy Wi-Fi setup i.e. iOS Wi-Fi settings sharing, WPS etc.
 AirPlay® allows music streaming from Mac, PC, iPod, iPhone, iPad
 AV Controller app for operating various functions from iOS or Android smartphones and tablets
 Access to: Intermet Radio (vTuner): MP3, WMA
 Streaming Services (Spottify®, Pandora®) "Music service availability varies by region.
 Music files on PC/NAS: WAV, MP3, WMA, AAC, FLAC, Apple Lossless, AIFF, DSD - DLNA 1.5 certified
- Gapless playback compatibility allows play without interruption
- · Front panel USB Digital Connection for iPod and iPhone

- Advanced multi-language GUI on-screen display with HD Font
- HDMI CFC with versatile control from AV Receiver remote control
- YPAO R.S.C. (Reflected Sound Control) sound optimisation with multi-point measurement HDMI front panel input for devices such as camcorders and digital cameras
- Ability to change HDMI input while in Standby Through mode
 Background Video feature (for Radio/USB/Bluetooth/AUDIO/NET/AUX input)
- SCENE buttons with direct power on (BD/DVD, TV, Net and Radio)
 Quick and simple to use
 HDMI CEC powers up compatible TVs and Blu-ray Disc™ players

Surround Realism


- HD Audio decoding with CINEMA DSP 3D (17 DSP programmes)
- Compressed Music Enhancer with CINEMA DSP
 Dialogue Lift ensures that dialogue comes from the centre of the screen
- Dialogue Level Adjustment for proper sound balance with dialogue and vocals
 Virtual Presence Speaker function for CINEMA DSP 3D surround without Front Presence Speakers
- Virtual CINEMA FRONT provides virtual surround sound with 5 speakers in front Virtual Surround Back Speaker for playing 7.1-channel content with a 5.1-channel system
- YPAO Volume to ensure natural sounds even at low volume
- Extra Bass enriches the powerful bass sound even with small speakers
 SILENT CINEMA to enjoy surround sound with headphone

Versatile Zone Control

- HDMI Zone B for audio/video streaming to another room (same content as main room)
- Versatile Zone 2 Control i.e. Power/Volume/Control by App
- Remote input/output
- Programmable +12V trigger output

Eco-Friendly Design

- ECO mode operation for about 20%* less power consumption *Compared to power consumption when ECO mode is off (Yamaha measurement)
- Low standby power consumption of 0.1W
- Auto power standby function with variable time setting
 Improved Network and HDMI Standby Power Consumption





AV Receiver RX-A850

Support for the Latest Surround Format, Dolby Atmos®

With Dolby Atmos, sound comes alive from all directions, including overhead. Advanced sound processing and time correction greatly improve the sound realism of moving objects, as well as providing a realistic sense of height and direction of motion. The combination of Dolby Atmos and RX-A850 will fill the room with multi-dimensional sound to make you feel as if you are right in the middle of the story unfolding on the screen.



Wireless Audio Streaming and Hi-Res Audio

Bluetooth support gives you the convenience of wireless music playback, while Wi-Fi Built-in improves installation flexibility. These two features provide easy access to countless music sources. In addition, compatibility with FLAC/WAV/AIFF 192kHz/24bit, Apple Lossless and DSD 2.8MHz/5.6MHz formats means that you can easily play high resolution audio from a networked NAS, PC or USB.



4K Ultra HD Full Support with 4K60p, HDCP2.2

This unit completely supports with the latest HDMI standards. It can perform 4K Ultra HD upscaling to boost a lower resolution image and supports 4:4:4 video signal for more vibrant and lifelike images, so you can fully enjoy the high definition video quality of 4K. It also adheres to the HDCP2.2 convright protection standard for 4K video transmission Multiple HDCP2.2 compliant inputs and outputs design (3 in / 2 out) is ready for future system expansion.

AV Receiver

4K Ultra HD FULL SUPPORT

- 4K Video at 60 Frames per second support (4:4:4) HDCP 2.2 Input / Output
- 4K Upscale


4K Ultra HD compatible video source

4K Ultra HD compatible TV

Main	Sn	ecifications	

Audio Section	
Rated Output Power (8 ohms, 20 Hz-20 kHz, 0.06% THD, 2 ch driven)	
Front L/R	100 W + 100 W
Maximum Effective Output Power (8 ohms, 1 kHz, 10% THD, 1 ch driven)	
Front L/R	160 W + 160 W
Centre	160 W
Surround L/R	160 W + 160 W
Surround Back L/R	160 W + 160 W
Dynamic Power/Ch (Front L/R, 8/6/4/2 ohms)	130/170/195/240 W

General	
Standby Power Consumption	
HDMI Control off, Standby Through off	0.1 W
HDMI Standby Through on	1.3 W
Network Standby on	2.4 W (wired)
	435 x 171 x 380 mm
Dimensions (W x H x D)	(with antenna up: 435 x 234 x 380 mm)
DIFFICUS (W X FI X D)	17-1/8" x 6-3/4" x 15"
	(with antenna up: 17-1/8" x 9-1/4" x 15")
Weight	10.6 kg; 23.4 lbs.

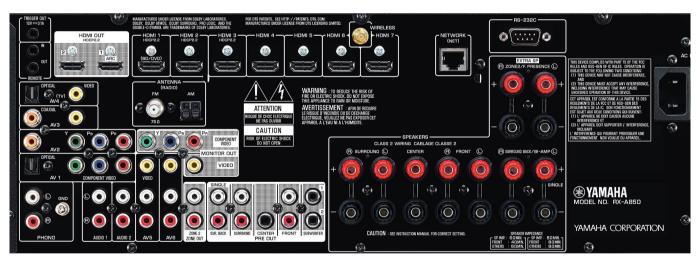

Extensive Connections

Inputs	
HDMI*1 (Audio Input Assignable*2, HDMI1,2,3:HDCP2.2 compatible)	8
Network (Ethernet / Wi-Fi)	1 / 1
USB*1	1
Radio Antenna*3 (FM / AM)	1 / 1
Optical Digital	2
Coaxial Digital	2
Analogue Audio*1 (with Phono)	6
Component Video (Audio Input Assignable)	2
Composite Video*1	5

- *1 Including front panel terminals.
 *2 Front HDMI input is not assignable.
 *3 The shape of the FM antenna terminal varies according to area.

Outputs	
HDMI (HDCP2.2 compatible)	2 (simultaneous)
Component Video Monitor	1
Composite Monitor	1
Pre Out	7.2ch
Speaker*4/*5/*6	7ch / 9 ter
Subwoofer	2 x mono
Headphone Jack	1

- *4 Assignable for surround back L/R to bi-amp (front L/R).
- *5 Extra speaker terminals are assignable to Zone 2 or Presence.
 *6 Banana-plug compatible speaker terminals are not available in some areas.

Others Zone 2 Audio Out Remote In/Out +12V/0.1A Trigger Out RS-232C Terminal for Detachable Power Cable

• "Made for iPod" and "Made for iPhone" mean that an electronic accessory has been designed to connect specifically to iPod or iPhone, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the •"Made for iPhoa" and "Made for iPhoa" mean that an electronic accessory has been designed to connect specifically to iPhoa or iPhone, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod or iPhone may affect wireless performance. AirPlaya*P, Plaqi, Phone, iPhoq danson, air Opdo anno, and iPhoq hanon, and iPho designs and specifications are subject to change without notice.